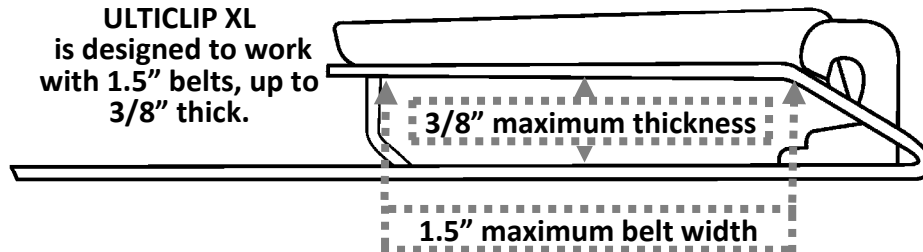# ULTICLIP XL

READ BEFORE USING

Complete information and instructional videos can be found at:
WWW.ULTICLIP.COM/FAQS

MAXIMUM CLAMPING CAPACITY
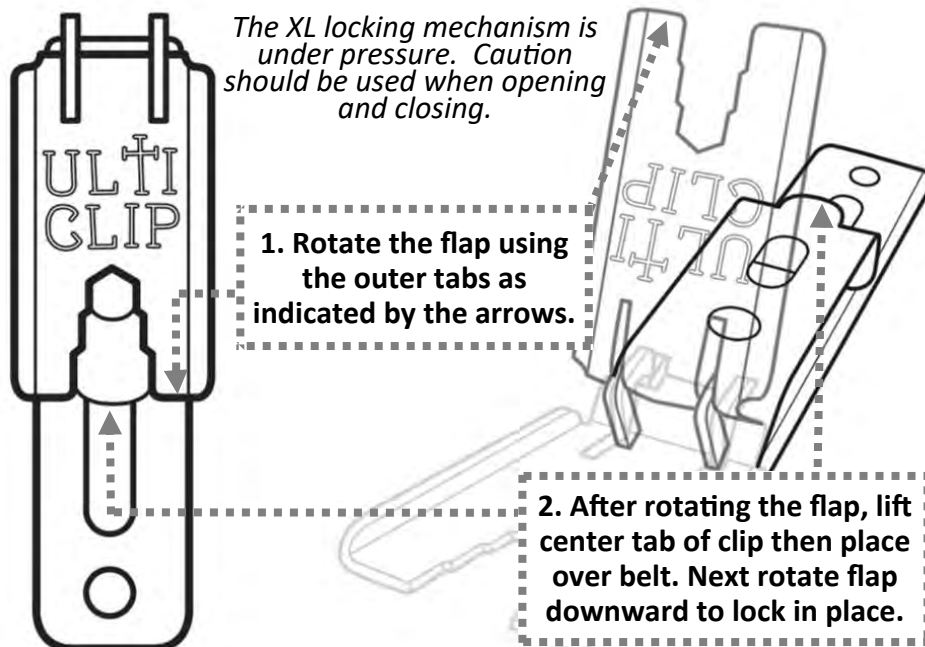
ULTICLIP XL
is designed to work
with 1.5" belts, up to
3/8" thick.

3/8" maximum thickness

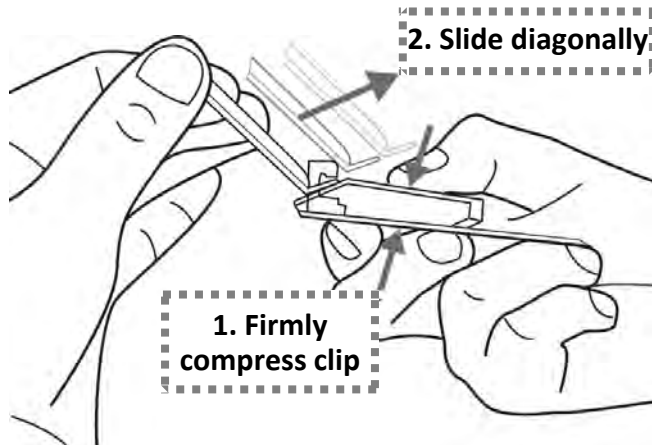1.5" maximum belt width

ULTICLIP XL CLAMPING INSTRUCTIONS

The XL locking mechanism is under pressure. Caution should be used when opening and closing.

ULTI CLIP

1. Rotate the flap using the outer tabs as indicated by the arrows.

2. After rotating the flap, lift center tab of clip then place over belt. Next rotate flap downward to lock in place.

REMOVAL OF MULTI-TOOL

Remove and secure firearm before removing multi-tool.
Never remove multi-tool with a holstered firearm.

MULTI-TOOL FUNCTIONS

Screwdriver

ULTI CLIP

1/4", 5/16" 3/8"
WRENCH

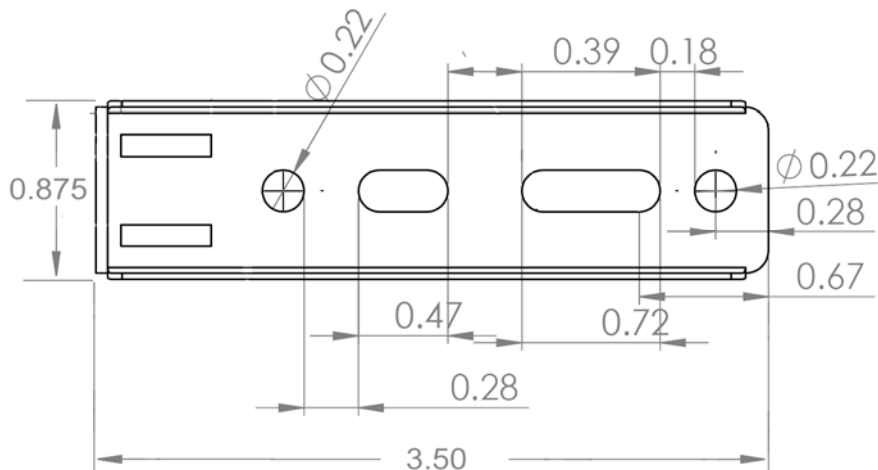**2. Slide diagonally**

1. Firmly compress clip

*Due to the pressure required to compress the clip; some users may have difficulty or be unable to remove the multi-tool.

MOUNTING TEMPLATE

This template may be printed and used to check for correct length, width and hole alignment. If your web browser does not print the template to scale you will need to download the file and open it with Acrobat Reader then choose "actual size" as your print option.

VIEW: Bottom of Ulticlip XL

Ø0.22 0.39 0.18

0.875 Ø0.22 0.28 0.67

0.47 0.72

0.28

3.50

*If template is printed to scale the distance between the two lines should equal 3.5"
**All measurements are in inches